



Main Features:

- Frequency Range: 0.1 to 23 GHz.
- Typical values: P_{sat} 27 dBm, Gain 28 dB.
- RF connectors (I/O): 2.92 mm Female
- Solder filtered pins for DC connection
- Several mounting options
- Gold plated compact aluminum housing
- Hi-reliability and dedicated screening/ environmental tests available under request

ERZ-HPA-0010-2300-27

The ERZ-HPA-0010-2300-27 is a High Power Amplifier providing an output power of 28 dBm and a gain of 28 dB. The compact size and modularity makes it ideal for a wide range of applications.

Typical applications:

- Industrial / Laboratory
- Satcom / Telecom
- Space / Aerospace

Performance

Parameter	Value			Units
	Min	Typ	Max	
Frequency	0.1	-	23	GHz
Output Power (P _{sat})	26	28	31	dBm
Small Signal Gain	26	28	32	dB
Gain Flatness	-	±1.5	-	dB
Noise Figure	1.5	4	8	dB
VSWR input	-	1.5:1	2.0:1	-
VSWR output	-	1.5:1	2.0:1	-
DC Voltage	9	12	15	V
Power Consumption	-	7	-	W
RF Connectors	2.92 mm Female IN/OUT			-

Specifications at a case temperature of 25°C at 12 V

Saturated Output Power

Figure 1 shows saturated output power measurement as a function of frequency at room temperature (25°C).

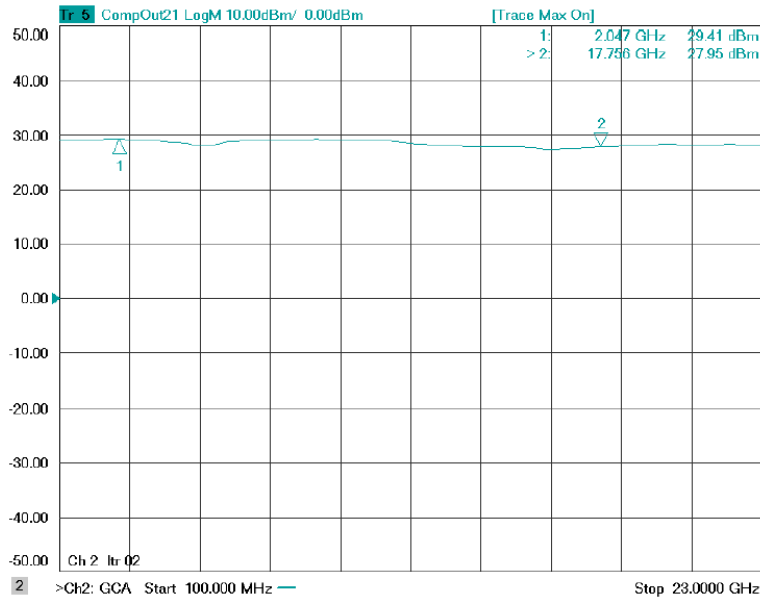


Figure 1: ERZ-HPA-0010-2300-27 Psat

Small Signal Gain

Figure 2 shows the small signal gain measurement as a function of frequency at room temperature (25°C).

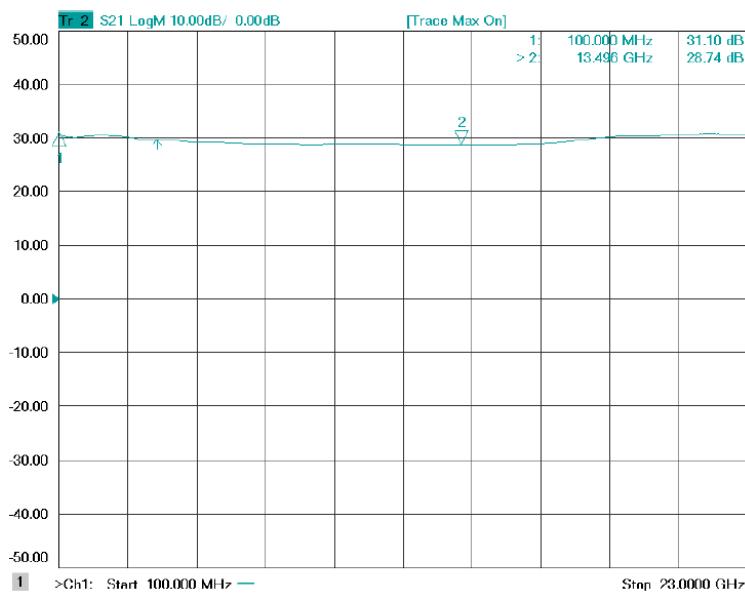


Figure 2: ERZ-HPA-0010-2300-27 Small Signal Gain

Noise Figure

Figure 3 shows noise figure measurement as a function of frequency at room temperature (25°C).

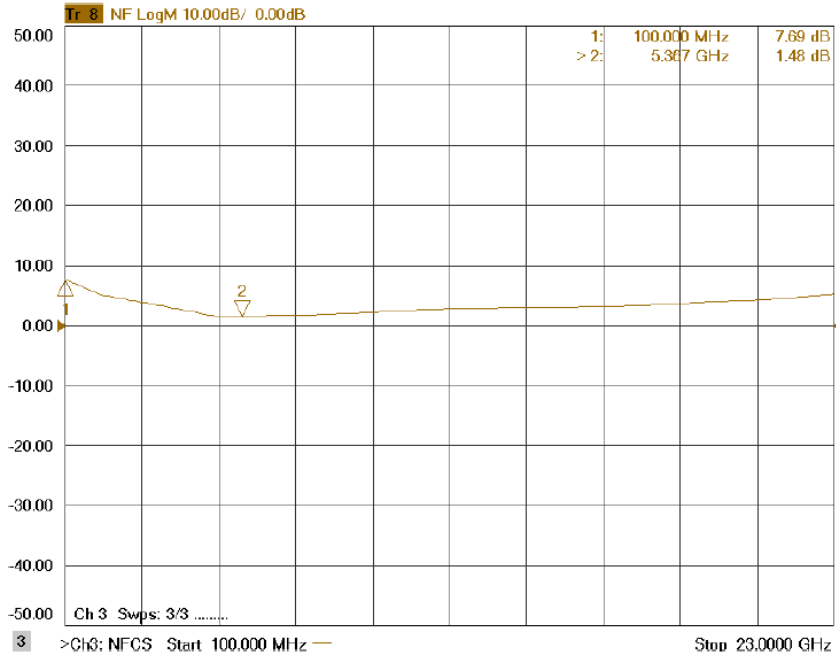


Figure 3: ERZ-HPA-0010-2300-27 Noise Figure

Input and Output Matching

Figure 4 and Figure 4 show input (S11) and output (S22) VSWR as a function of frequency at room temperature (25°C).

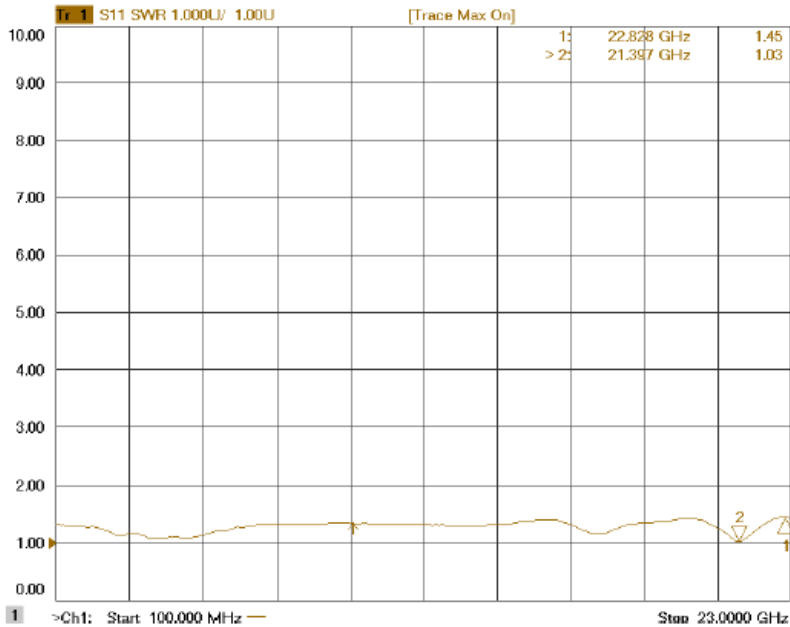


Figure 4: ERZ-HPA-0010-2300-27 Input Matching

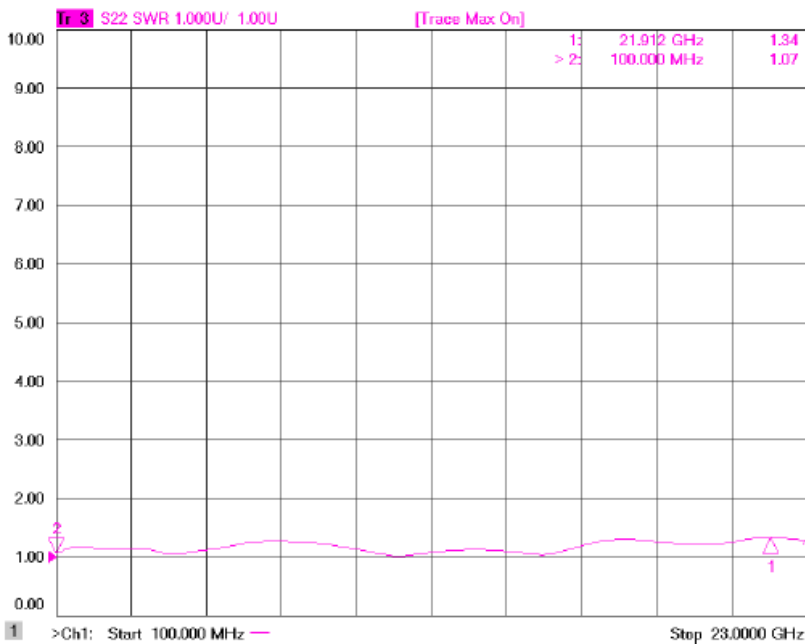


Figure 5: ERZ-HPA-0010-2300-27 Output Matching

Absolute Maximum Ratings

Condition	Value
DC Voltage	+15 VDC
Maximum Input Power (CW)	+5dBm
Operation temperature (at case)	-40 to 85 °C
Storage temperature	-55 to 125 °C

- Stress above these ratings may cause permanent damage to the device.
- It is final user responsibility to maintain the amplifier within the specified ranges.

Environmental Specifications (By Design)


Operating Temperature:	-45 to +85 °C	(MIL-STD-810F, method 520.2)
Storage Temperature:	-55 to 125 °C	(MIL-STD-810F, method 520.2)
Vibration:	8g rms	(MIL-STD-810F, method 514.5)
Shock:	20g, 11ms, saw-tooth	(MIL-STD-810F, method 516.5)
Acceleration:	15g	(MIL-STD-810F, method 513.5)

RoHS & REACH Compliance

This part is compliant with EU 2011/65/UE RoHS (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) and REACH (Registration, Evaluation, Authorization and restriction of Chemical substances) directives.



Mechanics and Housing

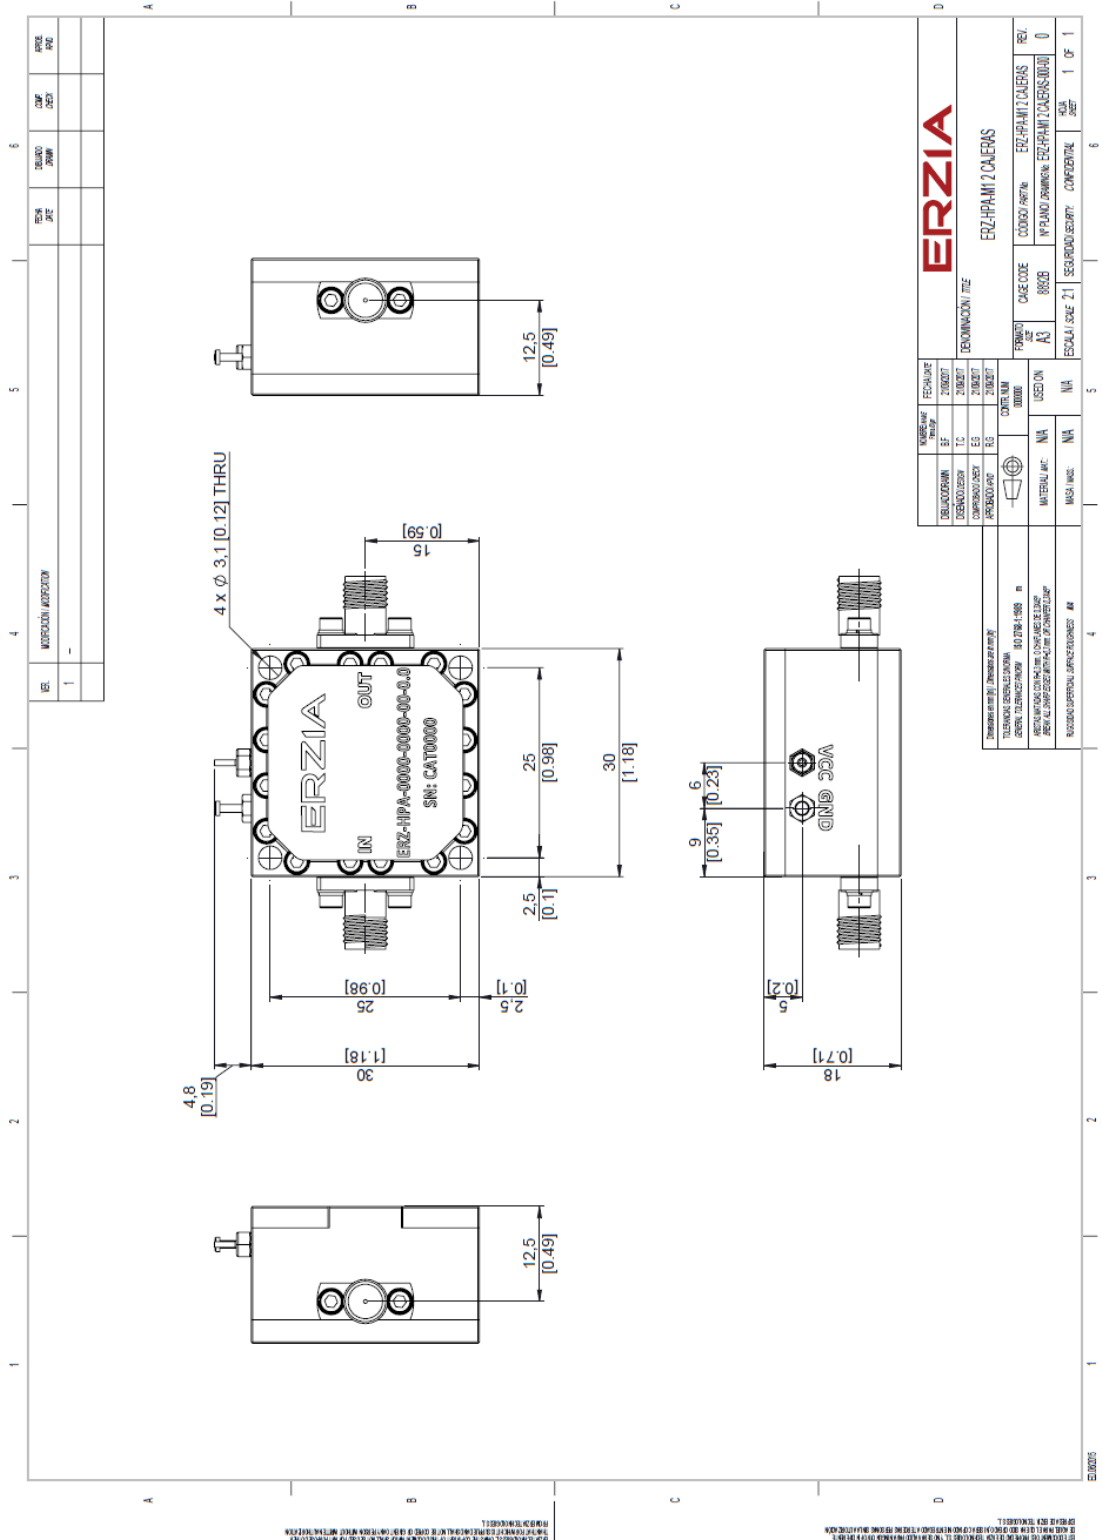

ERZIA	
ERZ-HPA-0010-2300-27	
DESIGNATION	ERZ-HPA-0010-2300-27
REVISION	0
DATE	
DESIGNED BY	
CHECKED BY	
DATE	
REV. 1	OF 1

DESIGNATION	ERZ-HPA-0010-2300-27
REVISION	0
DATE	
DESIGNED BY	
CHECKED BY	
DATE	
REV. 1	OF 1

DESIGNATION	ERZ-HPA-0010-2300-27
REVISION	0
DATE	
DESIGNED BY	
CHECKED BY	
DATE	
REV. 1	OF 1

DESIGNATION	ERZ-HPA-0010-2300-27
REVISION	0
DATE	
DESIGNED BY	
CHECKED BY	
DATE	
REV. 1	OF 1

DESIGNATION	ERZ-HPA-0010-2300-27
REVISION	0
DATE	
DESIGNED BY	
CHECKED BY	
DATE	
REV. 1	OF 1

DESIGNATION	ERZ-HPA-0010-2300-27
REVISION	0
DATE	
DESIGNED BY	
CHECKED BY	
DATE	
REV. 1	OF 1

Documentation and Test Reports

All modules are at least delivered with: Electrical Test Report, Certificate of Conformance, Certificate of Acceptance and Origin. Optionally, units can be environmentally tested (temperature, vibration...).

Option (HS): Heat Sink

A heat sink (HS) can be provided to allow the operation of Power Amplifiers. Please note that most power amplifiers need heat sink or appropriate heat dissipation strategy.

Space Usage


Most of ERZIA's products are based on rad-hard technologies and can be manufactured and integrated according to specific hi-rel standard-screening for space, aeronautics or specific hi-reliability usage.

Customization and Extended Performances

ERZIA can fully design or adapt one of the existing RF amplifiers designs according to your specifications. Please contact us for additional information.

Model Number Codification

MODEL NUMBER

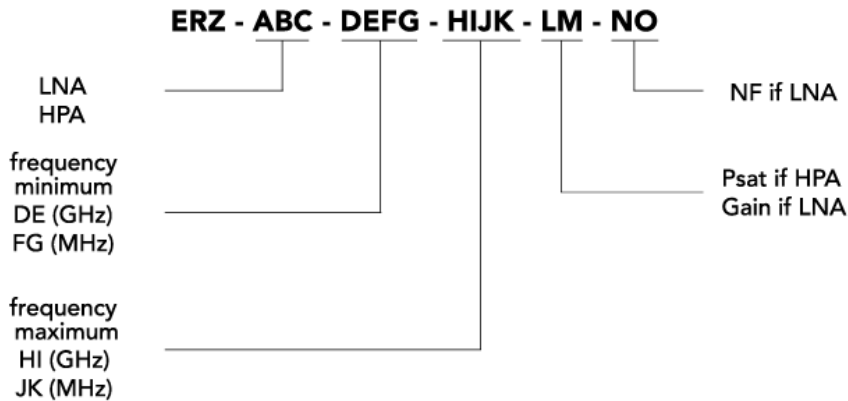

ERZIA

20181212_rev1.3

Copyright © 2018 ERZIA Technologies. All rights reserved. This information is commercial and indicative, subject to change without notice

Tel: +34 942 29 13 42

sales@erzia.com

www.erzia.com